# Deicers and Aircraft Washers from Oshkosh AeroTech



**Defense** When support IS the mission

PEST

Deicers from Oshkosh AeroTech are available with many features and options for protecting the aircraft, speeding deicing / washing operations, and using deicing fluid more efficiently.

#### Features & Options include:

- Aircraft protection sensors
- Single person operations
- Open or enclosed baskets
- Extended boom options for large aircraft
- AirFirst and Proportional Mix options to reduce glycol use
- BakTrak for ease of driving from the basket
- Ground level access to most components
- \*Options and features subject to change


Consult your Oshkosh AeroTech representative for more information on features and options.

### Specifications:

- Height (Boom Stowed)
- Length (Nozzle to Boom End)
- Width
- Working Height
- Boom Lifting Capacity
- Side Reach (to Basket, at Boom Angle)
- GVW (Varies with Options)

149 in / 3.78 m 469 in / 11.9 m 126 in / 3.2 m Std Boom 499 in / 12.67 m, XR Boom 635 in / 16.13 m 450 lb / 204 kg 354 in / 9 m at 0°

Tanks Dry: 28,744 to 33,174 lb/ 13,038 to 15,047 kg Tanks Full: 45, 788 to 52,948 lb / 20,765 to 24,016 kg

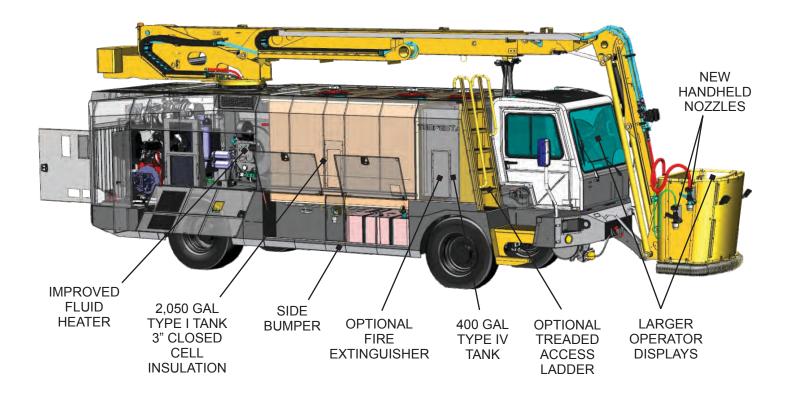

## Contact Oshkosh AeroTech for more details.



#### oshkoshaerotech.com An Oshkosh Corporation (NYSE:OSK) Business



© 2024. Oshkosh AeroTech and the Oshkosh logo are trademarks of Oshkosh Corporation. Oshkosh, Wisconsin, USA. Specifications, descriptions, and illustrative material in this literature are as accurate as known at the time of publication and are subject to change without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment. All measurements are nominal values.